

HDMI 4X2 MATRIX SWITCH WITH AUDIO EXTRACTION

14.01.3579


Quick Installation Guide Ver. 1.0

All brand names and trademarks are properties of their respective owners

INTRODUCTION:


14.01.3579 is a true 4K60 4:4:4 4x2 HDMI matrix switch, supporting HDMI 2.0, HDCP 2.2, HDR and up to 18 Gbps bandwidth. This switch allows any source (Blu-ray, UHD Blu-ray, satellite receiver, game consoles, PCs, etc...) to be shown on any of the connected displays.

Remote Control



1. Power ON/OFF button.
2. HDMI Input Source Selector: Select an input source.
3. Audio Output control buttons.
ARC: Enable or disable Audio Return Channel.
SPDIF: Enable or disable Optical Digital Audio output.
2.0: Sets audio output mode to 2.0 channel.
5.1: Sets audio output mode to 5.1 channel.
PASS: Use the AUDIO EDID from Display device.

CONNECTION DIAGRAM:

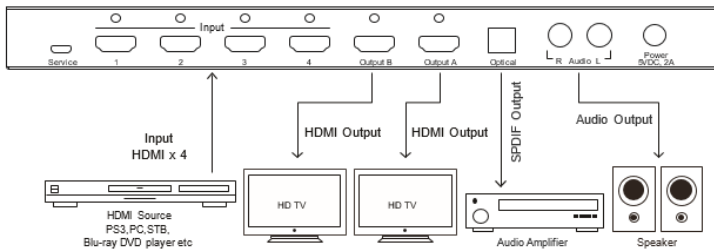


How to Connect

1. Use a HDMI cable to connect a HD source to the HDMI Input Port.
2. Use a HDMI cable to connect a HD display to the HDMI Output Port.
3. For audio connection, choose one from the following options.
 - a. To use HDMI pass-through, use the HDMI cable from step 2 to connect audio receiver to the HDMI Output Port. Your audio receiver will have to output video signal to your HD display.
 - b. To use Toslink, use a Toslink cable to connect to audio equipment. (Note: Toslink does not support Dolby Digital plus please change the input source's audio output to a different setting, if needed.)
 - c. To use R/L, use a R/L cable to connect a stereo audio equipment.
4. Connect the power adapter.
5. Note: If using Toslink cable, please make sure the rubber protective tip cover has already been removed from both ends before connecting them to devices.

FEATURES:

- Input: HDMI x 4.
- Output: HDMI x 2, Toslink/SPDIF x 1, Stereo RCA x 1.
- Supports Ultra HD 4Kx2K@60Hz.
- Supports 3D.
- Supports Standard Audio, DSD Audio, and HD(HBR) Audio.
- Supports HDMI2.0, HDCP2.2, HDR Signal format
- Supports 6.0Gbps TMDS/600MHz pixel clock rate per channel, maximum total TMDS through outputs 18Gbps.
- Supports uncompressed audio such as LPCM.
- Supports compressed audio such as DTS Digital, Dolby Digital, DTS-HD, and Dolby TrueHD.
- Supports up to 7.1CH digital surround on HDMI output.
- Supports up to 5.1CH digital surround on Toslink output.
- Supports up to 2.0 channel analog stereo on Stereo output.
- Support the ARC (Audio Return Channel).

PRODUCT OVERVIEW:

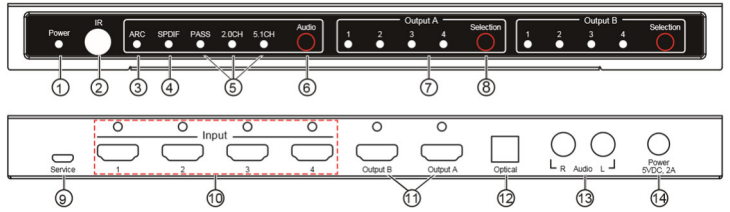

1. Power LED
2. Infrared for Remote Control
3. Audio Return Channel (ARC) LED Indicator
4. Optical Digital Audio Output LED Indicator
5. HDMI Pass-through/2.0CH/5.1CH Audio Channel LED Indicators
6. Audio mode selection Button
7. HDMI Input LED Indicators
8. Input Port selection Button
9. Service (Manufacturer only)
10. HDMI Input Ports
11. HDMI Output Port
12. Optical Digital Audio Output Port
13. L/R Analog Stereo Audio Output Port
14. Power Input Port

SPECIFICATIONS:

Video and Audio	
HDMI resolution	4Kx2K@24/25/30/60fps@60Hz,3D(1080P@24/60/120Hz),1080P/1080i/720P/576P/576i/480P/480i@24/30/50/60fps@120Hz
HDMI version	HDMI2.0, HDCP2.2
Support video color format	36-bit Deep Color all channels maximum
Audio output	HDMI pass-through Up to 7.1CH Toslink output up to 5.1 ch RCA L/R out put stereo audio
Max bandwidth per channel	600MHz
Max baud rate per display	18Gbps
Input/Output TMDS signal	0.5~1.5V p-p(TTL)
Input/Output DDC signal	5V p-p(TTL)
Input cable distance	≤50ft/15m 24 AWG HDMI high speed Cable at1080P@24bit 60Hz
Output cable distance	≤50ft/15m 24 AWG HDMI high speed Cable at1080P@24bit 60Hz
Environmental	
Operating Temperature range	5°F to 131°F / -15°C to 55°C
Operating Humidity range	5% to 90% RH (No Condensation)
Power Requirements	
Max working current	1A
External Power Supply	DC5V/2A

PACKAGE CONTENTS:

- 1x Main unit
- 1x Remote Control
- 1x User Manual
- 1x Power adapter